


# PIANO ZERO

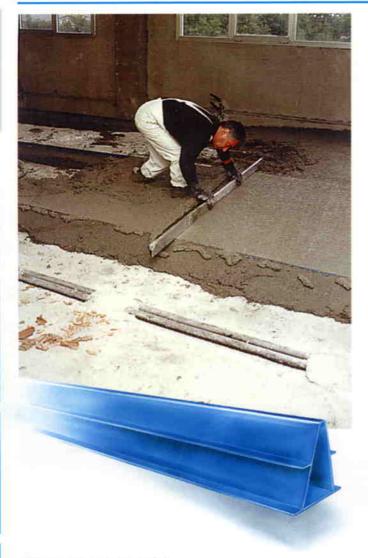

PVC guide to create castings with Politerm. Expansion joint for floors

#### MAIN APPLICATIONS

· Formation of castings for direct laying of floors (with traditional sand/cement, self-levelling mortar).

· Ideal for gluing floors on castings made with POLITERM and the PIANO ZERO guide.

Guide to create roof thermal-acoustic insulation.

· Expansion joint to replace the mechanical break.

# **TECHNICAL FEATURES**

PIANO ZERO is produced with high-strength, premium quality PVC: - width 35 mm.

- height 50 mm.
- colour: light-blue.

Will not change over time.

Resistant against thermal excursions.

Moisture resistant.



# PIANO ZERO

#### **APPLICATION INSTRUCTIONS**

- The foundation must be perfectly clean.
- Position the PIANO ZERO guide, using cement mortar to attach and fix it very carefully, and even on the sides.
- •An anchor point should be created at least every 100 cm.
- The ends must also be fixed.
- The distance between the guides should not be greater than 1.50 linear metres when laying castings with Politerm.
- To lay concrete floors, the maximum distance is 5 linear metres.

## FLOOR THICKNESS

The casting with Politerm must have a minimum thickness of 5 cm. It must be well compacted and the interior should not contain any type of piping or cavities.

The concrete floor must have a minimum thickness of 15 cm.

#### WARNINGS


- When laying floor foundations, be careful not to damage the PIANO ZERO guide with material bearing piping and with the other tools present at the construction site.
- If the PIANO ZERO is used as an expansion joint for concrete floors, do not walk on the floor for at least seven days.
- Any steam barriers must be installed prior to laying the PIANO ZERO.
- For Politerm castings, any electrically welded grid must be laid below the PIANO ZERO guide.
- For concrete floors, prepare the electrically welded grid as shown in the figure.

### PACKING

Slats, 2.00 linear metres, in bundles of 25 pieces each (50 linear metres).

Pallets: capacity 750 slats (1500 linear metres).

Other sizes available on request








Headquarters: Via Bertona, 1 / A 41038 San Felice Sul Panaro ( MO ) - Italy Tel. 39 - 535 / 82.161 - Telefax 39 - 535 / 82.970 Telex 52.05.24 SIDER I









AGENT, RETAILER AND/OR EXCLUSIVE DEALER